

PRODUCT INFO SHEET

Nanmac Corporation



Quality • Performance • Solutions

Bolt-Down Thermocouple with Flexible Leads A7 Series

The Bolt-Down Thermocouple contains #20 gauge (0.032") solid conductors with fiberglass insulation over each leg and fiberglass insulation overall. The fiberglass insulation has a maximum service temperature of 900 degrees Fahrenheit. The 'Bolt-Down' thermocouple is ideal for bolting it to a wall. Four standard sizes are available (#6, #8, #10, and #1/4" eyelets). In addition to bolting the thermocouple to a wall, it can also be hooked to a traveling conveyor or hung from a ceiling or hook.

NOTES:

- Fiberglass insulation is standard.
- Bolt-Down thermocouples available in four standard thermocouple types J, T, K, and E.
- Standard lengths are 36 inches (longer lengths available upon request).
- Choose from termination styles: bare leads, 2-pole connector, or spade plugs.

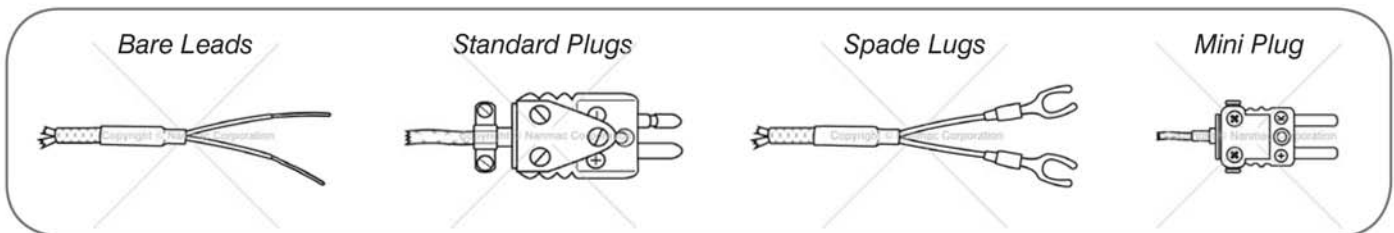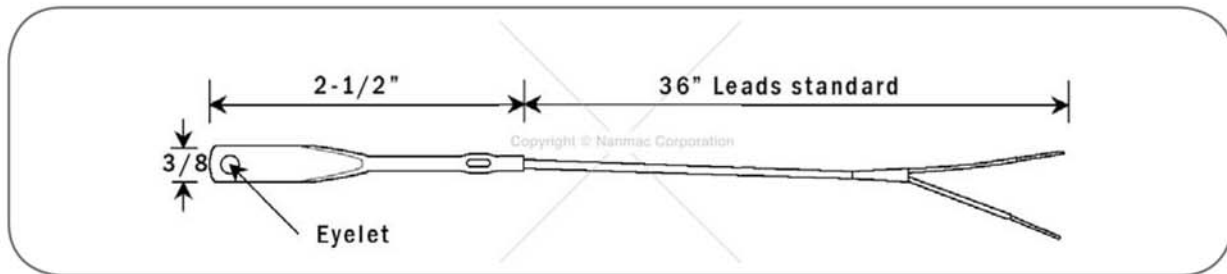

Choose One Option From Each Column

A7	A	B	C	D	E	F
	Thermocouple Type	Insulation Material	Stainless Steel Overbraid	Junction Style	Termination Style	Eyelet Size
	1 = J	1 = Fiberglass	1 = None	1 = Grounded	1 = Bare Leads	A = #6 (0.145")
	2 = K	2 = Teflon	2 = Yes	2 = Ungrounded	2 = Standard Plug	B = #8 (0.170")
	3 = T	3 = Nextel			3 = Spade Lugs	C = #10 (0.195")
	4 = E				4 = Mini Plug	D = 1/4 (0.260")

PO Box 6640
1657 Washington St., Bldg. 3
Holliston MA 01746
www.Nanmac.com
engineering@nanmac.com

Foremost in Temperature Measurement™
NANMAC

US & Canada: 1.800.786.4669
International: 1.508.872.4811
Fax: 1.508.879.5450
info@nanmac.com