

PRODUCT INFO SHEET

Nanmac Corporation


Quality • Performance • Solutions

Flow-Thru Thermocouples & RTDs D3 Series

Flow-Thru temperature sensors use either the Nanmac Right-Angle Ribbon Thermocouple or a Pt100 ohm RTD. The Right-Angle Ribbon Thermocouple utilizes a special ribbon element which eliminates conduction errors, typically caused by too shallow immersion in the flowing gas or liquid within the pipeline. Additionally, this ribbon design also provides response times in the low milliseconds. All Pt100 RTD devices are of sanitary design as the sensor is separated from the material within the pipeline by a 0.015 inch thick stainless steel diaphragm. Thermocouples requiring sanitary design are also available by adding the diaphragm to the thermocouple.

NOTES:

- Temperature range: -320 to 1,250 degrees Fahrenheit
- Pressure range: 0 to 4,000 psi
- Response time: 20 milliseconds to transient temperature changes
- Thermal junction: exposed Right-Angle Ribbon
- Union type: stainless steel flared tube union, furnished without tube nuts
- Thermocouple Types: E, J, K & T
- Termination is 1/4 inch OD stainless steel tube with standard size male plug attached.
- Other termination styles are available upon request; i.e. transition to flex leads, explosion proof connector heads, etc.
- RTD units are available upon request
- Special designs having ports of different dimensions are also available

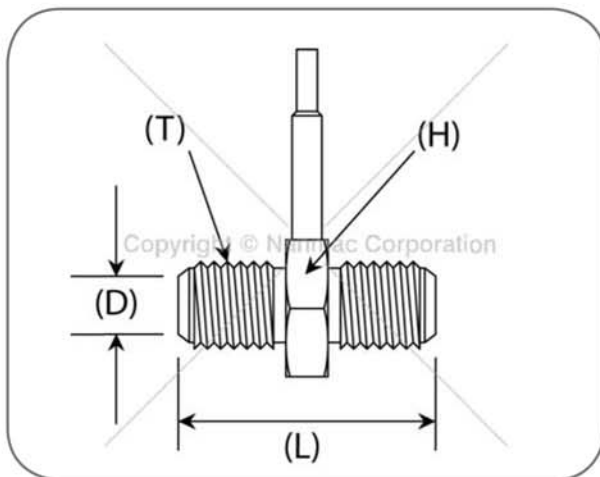

All units come standard with junction flush to inner wall surface. If junction is to protrude into the stream, specify dimension "E" up to 1/4 inch.

Tolerance on "E" is 0.015 inch.

Example: D3-4-K-E = 1/16

Specifications

Part No.	Tube Size (D)	Thread Size (T)	Hex (H)	Length (L)	Maximum Pressure
D3-4	1/4	7/16 - 20	7/8	1.78	4,000
D3-6	3/8	9/16 - 18	7/8	1.81	4,000
D3-8	1/2	3/4 - 16	7/8	2.03	3,000
D3-10	5/8	7/8 - 14	13/16	2.26	3,000
D3-12	3/4	1-1/16 - 12	1-1/8	2.63	3,000
D3-16	1	1-5/16 - 12	1-3/8	2.73	2,000

PO Box 6640
1657 Washington St., Bldg. 3
Holliston MA 01746
www.Nanmac.com
engineering@nanmac.com

Foremost in Temperature Measurement™
NANMAC

US & Canada: 1.800.786.4669
International: 1.508.872.4811
Fax: 1.508.879.5450
info@nanmac.com