


PRODUCT INFO SHEET

Nanmac Corporation

Quality • Performance • Solutions

Handheld Thermocouple Probes for Moving or Rolling Surface Measurement *H2 Series*

These thermocouple probes are provided in type K thermocouple calibration. A plastic handle with a retractable coil cord and miniature plug is attached. Contact us for your design requirement. Refer to our Handheld Data Logger / Thermometer and/or Handheld Thermometer which utilize these temperature probes.

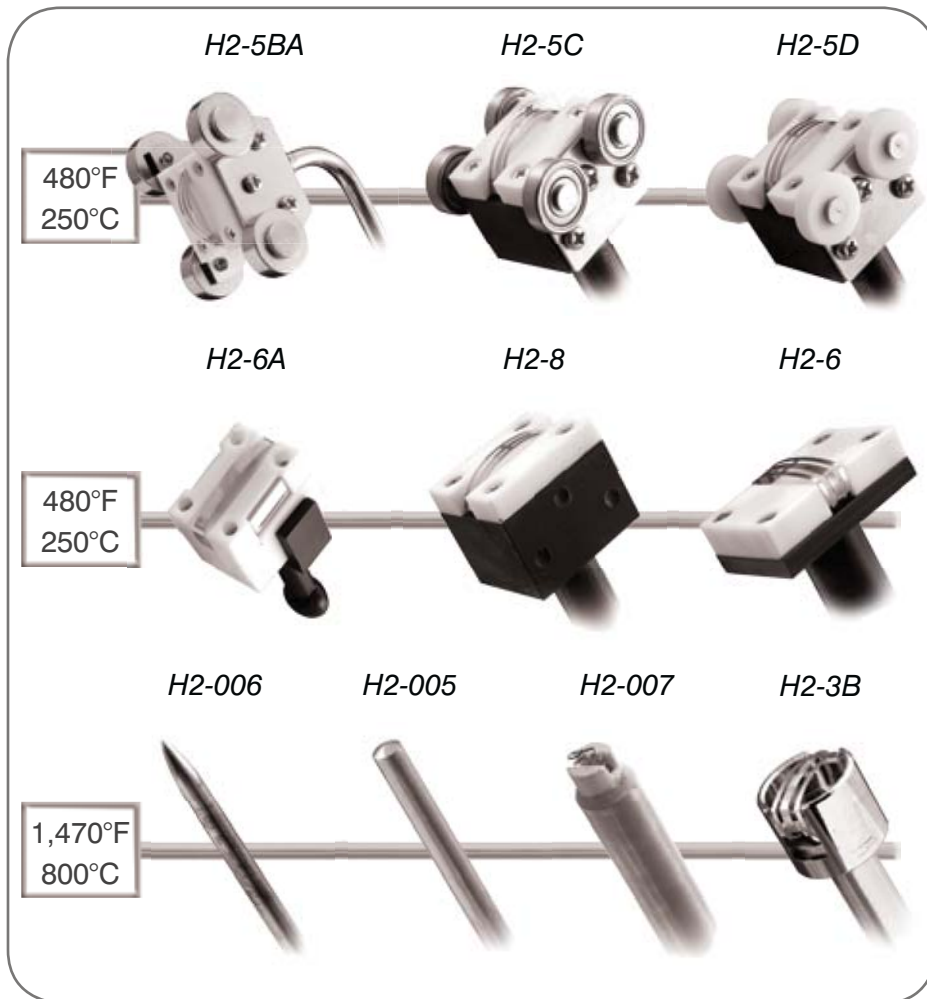

H2-5BA

- Roller surface, right angle St rollers for moving or rotating smooth surfaces (roller diameter = 0.75 inch).

H2-5C

- Roller surface, bearing rollers for smooth plastic and steel pipe plus moving or rotating surfaces (roller diameter = 0.63 inch).

H2-5D

- Miniature teflon rollers for moving or rotating surfaces in food processing (roller diameter = 0.63 inch).

H2-6A

- Magnetic surface probe (one ribbon) allows for sensor to be attached to measuring target (no handle).

H2-8

- Moving surface probe ideal for measuring moving or stationary flat metal or plastic surfaces.

H2-6

- Magnetic surface probe (three ribbon) designed for stationary surfaces, ideal for griddle temperatures.

H2-006

- Sharp tip probe for frozen and semi-solids.

H2-005

- General purpose probe, 1/8 inch stainless steel.

H2-007

- General stationary surface probe with ceramic tip and spring.

H2-3B

- General stationary surface probe, extended reach.