


Temperature Conversion Chart (°F and °C) Showing Melting Points of Commonly Used Elements

Temperature Conversion:

$$^{\circ}\text{F} = (^{\circ}\text{C} \times 9/5) + 32$$

$$^{\circ}\text{C} = (^{\circ}\text{F} - 32) \times 5/9$$

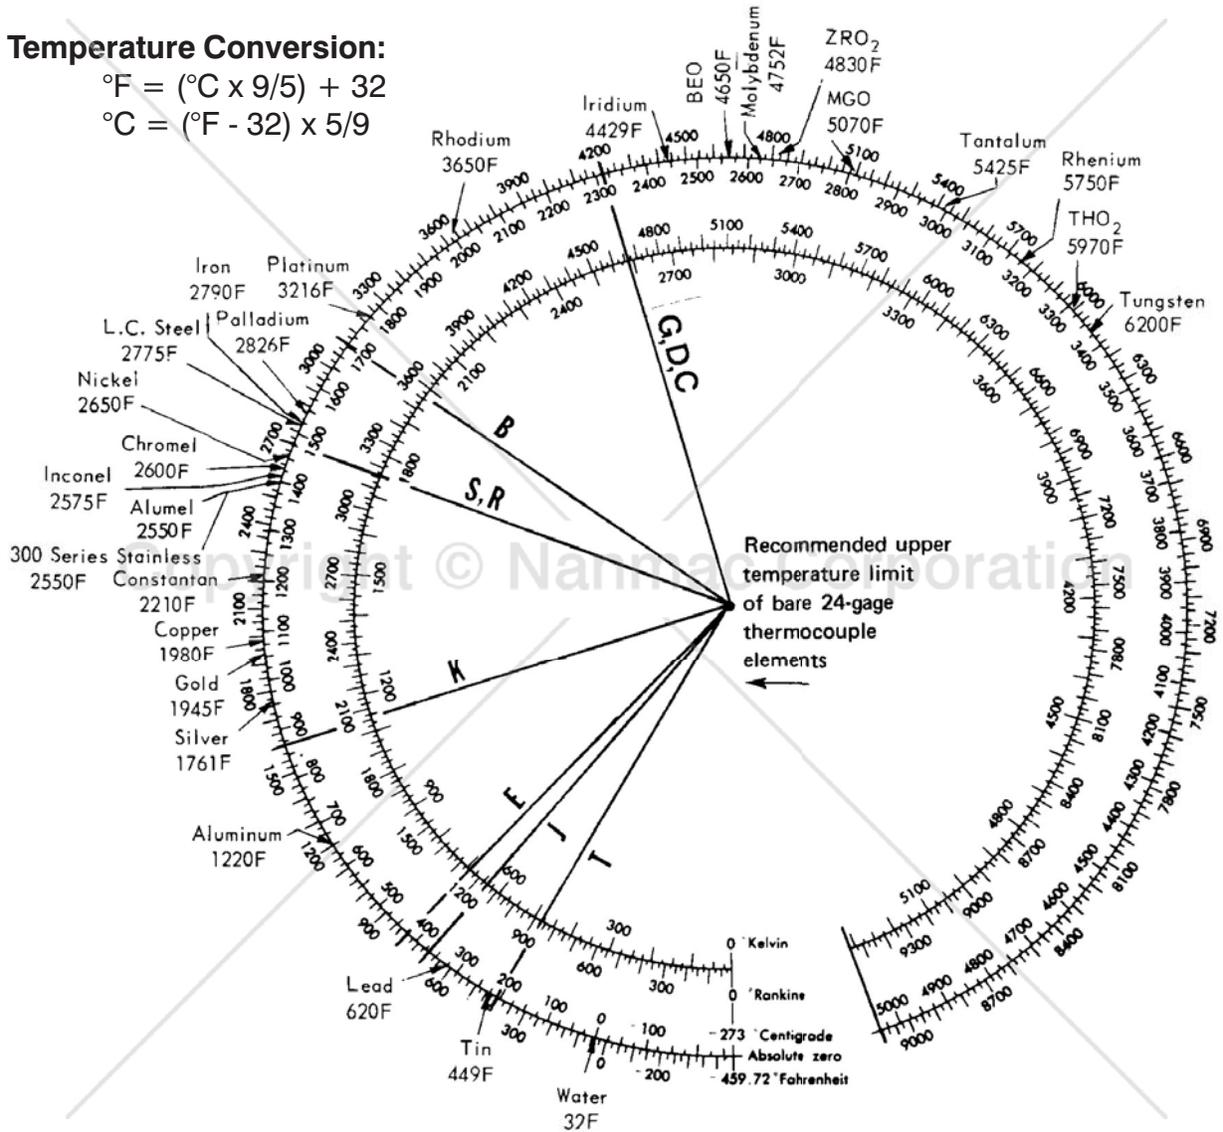

Useful Range of Thermocouples -458°F to 4,800°F

We credit the following trademarks used throughout this handbook to their respective companies:

Advance - Driver-Harris Co.
Alumel - Hoskins Mfg. Co.
Chromel - Hoskins Mfg. Co.

Constantan - Wilbur B. Driver Co.
Kapton - E.I. DuPont
Platinel - Engelhard Industries Inc.

Refrasil - Thomson Co.
Refrax - Carborundum Co.
Teflon - E.I. DuPont