

PRODUCT INFO SHEET

Nanmac Corporation


Quality • Performance • Solutions

Thermowells for Flanges (1/4" & 3/8" Diameter Elements) A28 Series

Flanges for Thermowells are specified separately.

NOTES:

- Thermowells available in SS 304, SS 316 and C-1018. Monel and other materials may be available upon request.
- NPSM internal pipe thread will accept NPT and NPS male threads.
- Primary weld is a "J" groove type, secondary weld is a 45 degree bevel groove. All welding is performed by Navy certified welders using inert gas shielded arc.
- Flanges for use with these thermowells must be specified separately

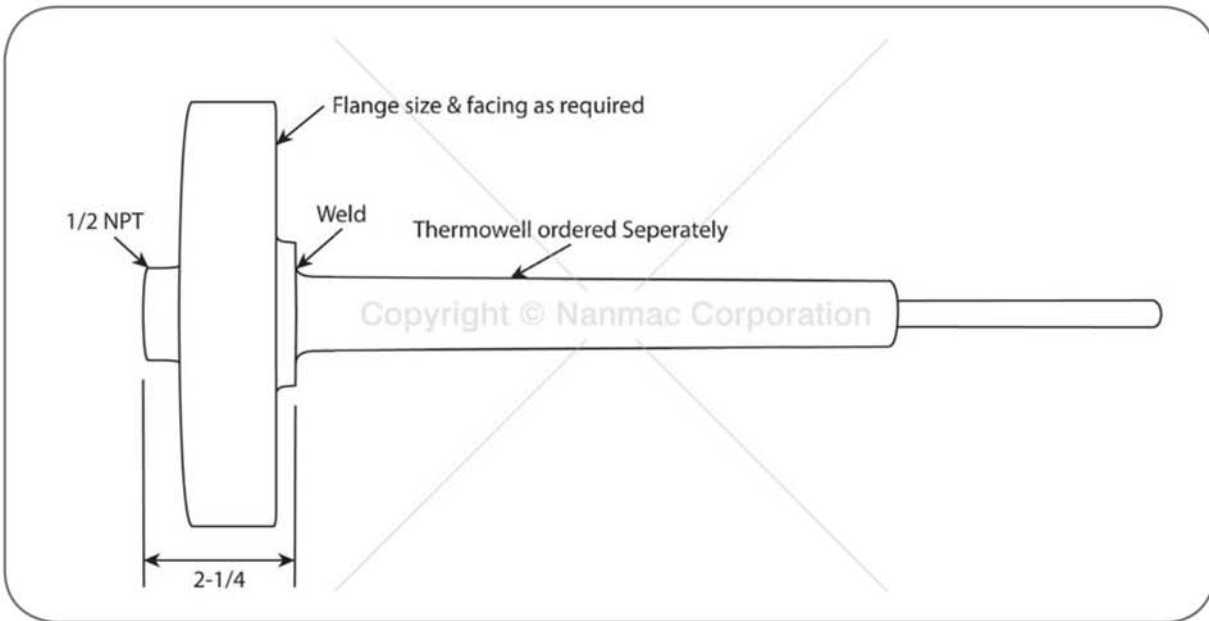

Thermowell Specifications

Element Length A	Insertion Length U	0.264" Bore for 1/4" Diameter Elements - Q=3/4"			0.385" Bore for 3/8" Diameter Elements - Q=7/8"		
		SS 304	SS 316	Carbon Steel	SS 304	SS 316	Carbon Steel
		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.
4	2	A28-1	A28-8	A28-15	A28-22	A28-29	A28-36
6	4	A28-2	A28-9	A28-16	A28-23	A28-30	A28-37
9	9	A28-3	A28-10	A28-17	A28-24	A28-31	A28-38
12	12	A28-4	A28-11	A28-18	A28-25	A28-32	A28-39
15	15	A28-5	A28-12	A28-19	A28-26	A28-33	A28-40
18	18	A28-6	A28-13	A28-20	A28-27	A28-34	A28-41
24	24	A28-7	A28-14	A28-21	A28-28	A28-35	A28-42

PO Box 6640
1657 Washington St., Bldg. 3
Holliston MA 01746
www.Nanmac.com
engineering@nanmac.com

Foremost in Temperature Measurement™
NANMAC

US & Canada: 1.800.786.4669
International: 1.508.872.4811
Fax: 1.508.879.5450
info@nanmac.com