


PRODUCT INFO SHEET

Nanmac Corporation


Quality • Performance • Solutions

Heavy Duty Thermocouple Assemblies with Metal Alloy Protection Tubes A33 Series

Our standard assembly consists of the metal alloy protection tube with a general purpose aluminum connector head attached. The connector head has a 1/2 NPT outlet port. This unit is assembled with a Chromel Alumel (Type K) ungrounded thermocouple with ceramic insulators and is connected to a two-wire ceramic terminal block in the connector head.

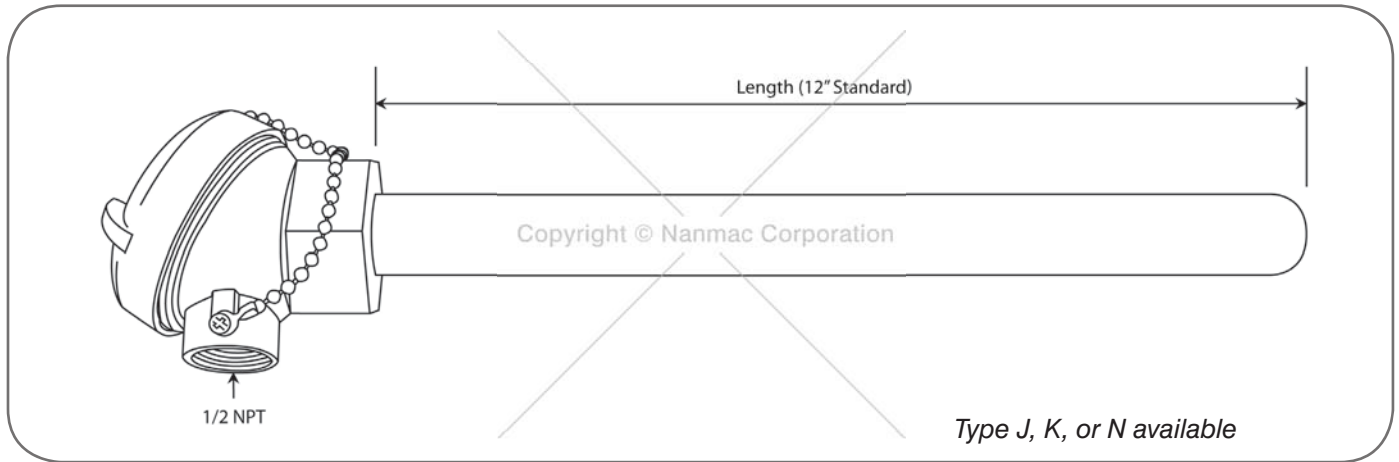

Specifications			
Part No.	Sheath Material	Max. Sheath Length	Sheath OD x ID (in.)
A33-10 A33-11 A33-12 A33-13	Inconel 601	60"	0.540 x 0.364 0.840 x 0.622 1.050 x 0.824 1.315 x 1.049
A33-14 A33-15 A33-16 A33-17	SS 304	60"	0.540 x 0.364 0.840 x 0.622 1.050 x 0.824 1.315 x 1.049
A33-18 A33-19 A33-20 A33-21	SS 446	60"	0.540 x 0.364 0.840 x 0.622 1.050 x 0.824 1.315 x 1.049
A33-22 A33-23 A33-24 A33-25	Carbon Steel	60"	0.540 x 0.364 0.840 x 0.622 1.050 x 0.824 1.315 x 1.049
A33-26 A33-27 A33-28 A33-29	Hastelloy C	60"	0.540 x 0.364 0.840 x 0.622 1.050 x 0.824 1.315 x 1.049

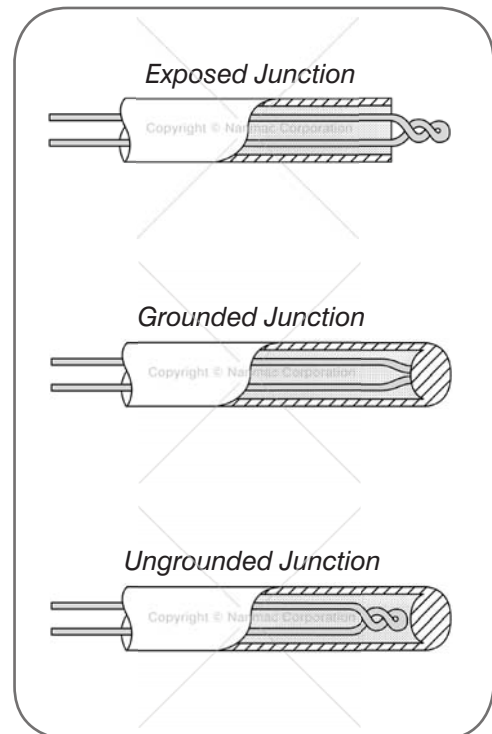

11 Mayhew Street
Framingham, MA 01702
www.Nanmac.com
engineering@nanmac.com

Foremost in Temperature Measurement™
NANMAC

US & Canada: 1.800.786.4669
International: 1.508.872.4811
Fax: 1.508.879.5450
info@nanmac.com